


OHMS CHECK  
 BLACK-TO-RED  
 BLACK-TO-WHITE  
 RED-TO-WHITE  
 P1 (BLACK)-TO-  
 P2 (WHITE)  
 VALUES  
 POWER CABLE WILL  
 VARY DEPENDING ON  
 THE HORSE POWER  
 P1 & P2 SHOULD  
 READ .08 TO 2.0 OHMS

VOLTAGE	LINE 1	LINE 2	LINE 3	TOGETHER
LOW	1 & 7	2 & 8	3 & 9	4,5 & 6
HIGH	1	2	3	4 & 7-5 & 8-6 & 9

### "DELTA" CONNECTION

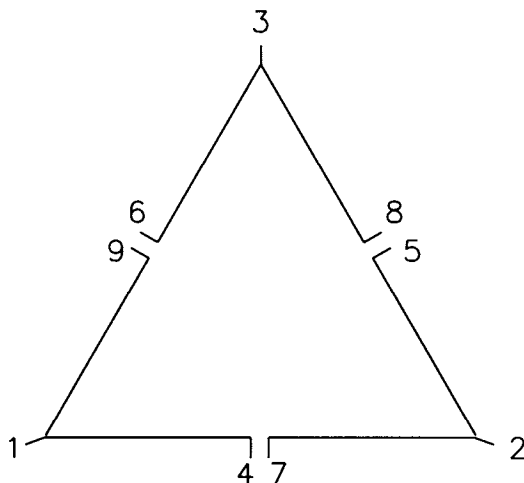


MEGA-OHMS CHECK  
 BLACK-TO-GREEN  
 RED-TO-GREEN  
 WHITE-TO-GREEN  
 W1 (RED)-TO-  
 W2 (ORANGE)  
 VALUES  
 POWER CABLE SHOULD  
 READ TO INFINITY  
 W1 & W2 SHOULD  
 READ FROM 310 M OHMS  
 TO 370 M OHMS

VOLTAGE	LINE 1	LINE 2	LINE 3	TOGETHER
LOW	1,6 & 7	2,4 & 8	3,5 & 9	NONE
HIGH	1	2	3	4 & 7-5 & 8-6 & 9

TYPICAL CATALOG DATA ONLY  
 CHECK NAMPLATES ON THE MOTOR TO  
 VERIFY CONNECTION TYPE(S)

DATE:  
 3-3-92  
 FILE NAME:  
 MOTOR1  
 DRAWN BY  
 LOS



PUMPS  
 AND  
 CONTROLS

RELIANCE ELECTRIC  
 SUBMERSIBLE MOTOR  
 CONNECTION DIA.